




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>A61F 2/44</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/41655</b> (43) International Publication Date: 20 July 2000 (20.07.2000)
(21) International Application Number: <b>PCT/US00/00604</b> (22) International Filing Date: <b>11 January 2000 (11.01.2000)</b> (30) Priority Data: <b>60/115,388      11 January 1999 (11.01.1999) US</b> (60) Parent Application or Grant SDGI HOLDINGS, INC. [/]; (). BOYD, Lawrence, M. [/]; (). BURKUS, J., Kenneth [/]; (). DORCHAK, John, D. [/]; (). BOYD, Lawrence, M. [/]; (). BURKUS, J., Kenneth [/]; (). DORCHAK, John, D. [/]; (). GANDY, Kenneth, A. ; ().	<b>Published</b>	
(54) Title: <b>INTERVERTEBRAL SPACERS WITH SIDE WALL ACCESSIBLE INTERIOR CAVITY</b> (54) Titre: <b>ESPACEURS INTERVERTEBRAUX A CAVITE INTERIEURE ACCESSIBLE PAR UNE PAROI LATERALE</b>		
(57) Abstract <p>Intervertebral spacers, tools for implanting intervertebral spacers and methods of promoting fusion bone growth in the space between adjacent vertebrae are provided. The spacers include an elongated body having a first end, a second end and an outer surface. Side walls connect the first and second ends. The elongated body also defines an interior cavity. The side wall defines an opening to the interior cavity in a side of the elongated body. At least one of the first and second ends has a discontinuity, such as a concave surface, for nesting with an adjacent spacer. The tools include spacer engaging means for engaging a spacer and occlusion means for blocking an opening defined in the spacer. In some embodiments, the occlusion means includes a plate extendible from the housing. In one specific embodiment the plate defines a groove which is disposed around a fastener attached to the housing so that the plate is slideable relative to the housing. The methods of promoting fusion bone growth include utilizing the inventive spacers described herein.</p> <p>(57) Abrégé</p> <p>L'invention concerne des espaceurs intervertébraux, des outils permettant d'installer ces espaceurs, et des techniques favorisant la croissance osseuse par fusionnement dans l'espace situé entre des vertèbres adjacentes. Ces espaceurs comprennent un corps allongé possédant une première extrémité, une seconde extrémité, et une surface extérieure. Les parois latérales relient les première et seconde extrémités. Le corps allongé définit également une cavité intérieure. Lesdites parois latérales définissent une ouverture vers la cavité intérieure, sur un côté du corps allongé. Au moins l'une des première et seconde extrémité présente une discontinuité, telle qu'une surface convexe, destinée à s'emboîter dans un espaceur adjacent. Les outils comprennent un organe d'engagement d'espaceur qui permet d'engager ledit espaceur, et un organe d'occlusion qui bloque une ouverture définie dans l'espaceur. Selon certains modes de réalisation, l'organe d'occlusion comprend une plaque extensible à partir du logement. Selon un mode de réalisation spécifique, la plaque définit une rainure entourant un système de fixation fixé au logement, de sorte que ladite plaque peut coulisser par rapport à ce dernier. Les techniques favorisant la croissance osseuse par fusionnement consistent à utiliser les espaceurs de cette invention.</p>		



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)
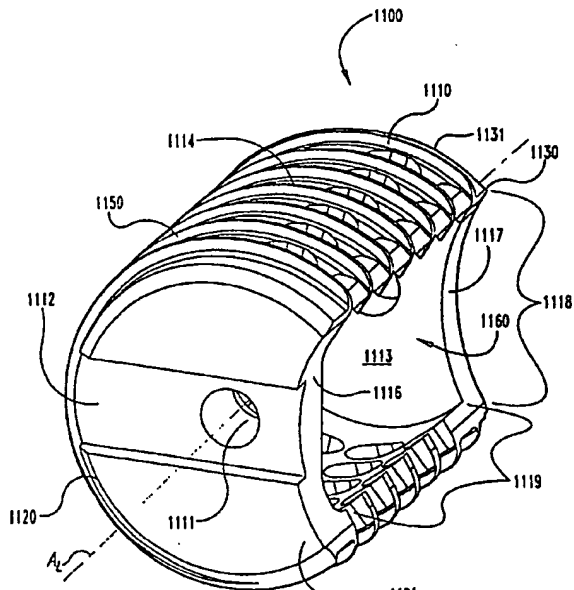
<p>(51) International Patent Classification <sup>7</sup> : A61F 2/44</p>	<p>A2</p>	<p>(11) International Publication Number: WO 00/41655 (43) International Publication Date: 20 July 2000 (20.07.00)</p>
<p>(21) International Application Number: PCT/US00/00604 (22) International Filing Date: 11 January 2000 (11.01.00) (30) Priority Data: 60/115,388 11 January 1999 (11.01.99) US (71) Applicant (for all designated States except US): SDGI HOLDINGS, INC. [US/US]; Suite 508, 300 Delaware Avenue, Wilmington, DE 19801 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): BOYD, Lawrence, M. [US/US]; 688 S. McLean Boulevard, Memphis, TN 38104 (US). BURKUS, J., Kenneth [US/US]; 7162 Williams Hill Road, Columbus, GA 31904 (US). DORCHAK, John, D. [US/US]; P.O. Box 400, Midland, GA 31820 (US). (74) Agents: GANDY, Kenneth, A. et al.; Woodard, Emhardt, Naughton, Moriarty &amp; McNett, Bank One Center/Tower, Suite 3700, 111 Monument Circle, Indianapolis, IN 46204 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: INTERVERTEBRAL SPACERS WITH SIDE WALL ACCESSIBLE INTERIOR CAVITY</p>		
<p>(57) Abstract</p>		
<p>Intervertebral spacers, tools for implanting intervertebral spacers and methods of promoting fusion bone growth in the space between adjacent vertebrae are provided. The spacers include an elongated body having a first end, a second end and an outer surface. Side walls connect the first and second ends. The elongated body also defines an interior cavity. The side wall defines an opening to the interior cavity in a side of the elongated body. At least one of the first and second ends has a discontinuity, such as a concave surface, for nesting with an adjacent spacer. The tools include spacer engaging means for engaging a spacer and occlusion means for blocking an opening defined in the spacer. In some embodiments, the occlusion means includes a plate extendible from the housing. In one specific embodiment the plate defines a groove which is disposed around a fastener attached to the housing so that the plate is slideable relative to the housing. The methods of promoting fusion bone growth include utilizing the inventive spacers described herein.</p> 		

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Description**

5

10

15

20

25

30

35

40

45

50

55

5

10

5

## INTERVERTEBRAL SPACERS WITH SIDE WALL ACCESSIBLE INTERIOR CAVITY

15

The present application claims the benefit of U.S. Provisional Patent Application Serial Number 60/115,388, filed on January 11, 1999, which is hereby incorporated by reference in its entirety.

10

20

### BACKGROUND OF THE INVENTION

25

15

The present invention broadly concerns arthrodesis for stabilizing the spine. More specifically, the invention provides open-chambered intervertebral spacers, instruments for implanting the spacers and methods for promoting fusion bone growth between adjacent vertebrae.

30

20

35

Intervertebral discs, located between the endplates of adjacent vertebrae, stabilize the spine, distribute forces between vertebrae and cushion vertebral bodies. A normal intervertebral disc includes a semi-gelatinous component, the nucleus pulposus, which is surrounded and confined by an outer, fibrous ring called the annulus fibrosus. In a healthy, undamaged spine, the annulus fibrosus prevents the nucleus pulposus from protruding outside the disc space.

40

25

45

30

Spinal discs may be displaced or damaged due to trauma, disease or aging. Disruption of the annulus fibrosus allows the nucleus pulposus to protrude into the vertebral canal, a condition commonly referred to as a herniated or ruptured disc. The extruded nucleus pulposus may press on a spinal nerve, which may result in nerve damage, pain, numbness, muscle weakness and paralysis. Intervertebral discs may also deteriorate due to the normal aging process or disease. As a disc dehydrates and hardens, the disc space height will be reduced leading to instability of the spine, decreased mobility and pain.

50

55

5

2

10

15

20

25

30

35

40

45

50

55

Sometimes the only relief from the symptoms of these conditions is a discectomy, or surgical removal of a portion or all of an intervertebral disc followed by fusion of the adjacent vertebrae. The removal of the damaged or unhealthy disc will allow the disc space to collapse. Collapse of the disc space can cause instability of the spine, abnormal joint mechanics, premature development of arthritis or nerve damage, in addition to severe pain. Pain relief via discectomy and arthrodesis requires preservation of the disc space and eventual fusion of the affected motion segments.

Bone grafts are often used to fill the intervertebral space to prevent disc space collapse and promote fusion of the adjacent vertebrae across the disc space. In early techniques, bone material was simply disposed between the adjacent vertebrae, typically at the posterior aspect of the vertebra, and the spinal column was stabilized by way of a plate or rod spanning the affected vertebrae. Once fusion occurred, the hardware used to maintain the stability of the segment became superfluous and was a permanent foreign body. Moreover, the surgical procedures necessary to implant a rod or plate to stabilize the level during fusion were frequently lengthy and involved.

It was therefore determined that a more optimal solution to the stabilization of an excised disc space is to fuse the vertebrae between their respective end plates, preferably without the need for anterior or posterior plating. There have been an extensive number of attempts to develop an acceptable intradiscal implant that could be used to replace a damaged disc and maintain the stability of the disc interspace between the adjacent vertebrae, at least until complete arthrodesis is achieved. The implant must provide temporary support and allow bone ingrowth. Success of the discectomy and fusion procedure requires the development of a contiguous growth of bone to create a solid mass because the implant may not withstand the compressive loads on the spine for the life of the patient.

Several metal spacers have been developed to fill the void formed and to promote fusion. Sofamor Danek Group, Inc., (1800 Pyramid Place, Memphis, TN 38132, (800) 933-2635) markets a number of hollow spinal cages. For

5

3

10

15

20

25

30

35

40

45

50

55

example, U.S. Patent No. 5,015,247 to Michelson and U.S. Serial No. 08/411,017 to Zdeblick disclose a threaded spinal cage. The cages are hollow and can be filled with osteogenic material, such as autograft or allograft, prior to insertion into the intervertebral space. Apertures defined in the cage communicate with the hollow interior to provide a path for tissue growth between the vertebral endplates. In many cases, in order to provide spacers having sufficient load bearing capacity, two spacers must be bilaterally placed in the intervertebral space. The challenge in bilateral placement is to use properly sized spacers having sufficient load bearing capacity so that they will provide adequate support and will not extend outside of the intervertebral space where they could interfere with other spinal-associated structures, including the various spinal nerves and blood vessels. A need therefore exists for such spacers. The present invention addresses this need.

5

4

## SUMMARY OF THE INVENTION

10

This invention provides preferred interbody fusion spacers having features allowing for side-loading of substances into an interior cavity and also preferably allowing them to nest within each other, and thus allowing close placement of one or more spacers within the intervertebral space, tools for implanting the spacers and methods for promoting fusion bone growth between adjacent vertebrae. In one form of the invention, the spacers include an elongated body having a first end, a second end, an outer surface and a side wall connecting the first and second end. The elongated body defines a chamber, or interior cavity, that may optionally be filled with osteogenic material. At least one of the first and second ends, preferably both, has a discontinuity, such as a concave surface, for nesting with an adjacent spacer. The side walls of the inventive spacers define an opening to the interior cavity in a side of the elongated body, for loading a substance such as an osteogenic or osteoconductive substance, into the interior cavity.

15

20

25

30

35

40

45

In yet other forms of the invention, the spacers include an elongated body having a circumference, a first end wall, a second end wall, an outer surface and a side wall connecting the first and second end. The body defines a chamber, or interior cavity, and preferably has a plurality of openings for bone ingrowth that extend from the outer surface of elongated body into the interior cavity. In one embodiment, the side walls define a large opening communicating with the internal cavity of the spacer, for example extending from about 10% to about 50% around the circumference of the body, and extending along at least about 50% of the length of the body. The end walls are preferably configured for nesting with an adjacent spacer. Preferably, the discontinuities in the end walls and side walls both extend about the circumference of the body to substantially the same extent.

In other aspects of the invention, interbody fusion implant systems are provided. In one form of the invention, the systems include a first interbody fusion spacer as described above, along with a second interbody fusion spacer

50

55



5

5

as defined above. The second interbody fusion spacer may or may not have discontinuities in the end and/or side walls similar to those in the first spacer.

10

Tools for implanting spacers are also provided. The tools include spacer engaging means for engaging a spacer and occlusion means for blocking an opening defined in the spacer. In one form of the invention, the engaging means includes a shaft slidably disposed within a housing and having a threaded post for engaging a threaded tool hole in the spacer. In some embodiments, the occlusion means includes a plate extendible from the housing. In one specific embodiment, the plate defines a groove which is disposed around a fastener attached to the housing so that the plate is slideable relative to the housing.

15

20

10

Yet other aspects of the invention provide methods for promoting fusion bone growth between adjacent vertebrae. In one embodiment, a method includes providing the inventive spacers having an elongated body described above, preparing the adjacent vertebrae to receive the elongated body of the spacer in an intervertebral space between adjacent vertebrae and placing the body in the intervertebral space. In certain embodiments, two spacers can be bilaterally positioned.

25

15

30

The combination of the spacers of this invention with the tools and methods of this invention provide a versatile spacer without any compromise in biomechanical integrity. The spacers can be packed before or after implantation, preferably before.

35

20

Accordingly, it is one object of this invention to provide interbody fusion spacers and methods for using the spacers in an arthrodesis procedure.

40

Another object is to improve patient incidence of safe and satisfactory spinal stabilization and fusion.

25

Yet another object of the present invention is to provide spacers with good biomechanical features and osteogenic and fusion promoting features.

45

50

55

5

6

**BRIEF DESCRIPTION OF THE DRAWINGS**

10

FIG. 1 is a side perspective view of one embodiment of an interbody fusion spacer of the present invention.

5

15

FIG. 2 is a side perspective view of another embodiment of an interbody fusion spacer.

20

10

FIG. 3 is a top view of the spacer shown in FIG. 1.

FIG. 4 is a side perspective view of one embodiment of an interbody fusion implant system of the present invention.

25

15

FIG. 5 is a top view of the implant system of FIG. 4.

FIG. 6 is a side view of the implant system of FIG. 4.

30

20

FIG. 7 is a side perspective view of another embodiment of an interbody fusion implant system of the present invention.

35

FIG. 8 is a side perspective view of another embodiment of an interbody fusion implant system, showing spacers bilaterally placed with their chambers, or interior cavities, facing each other.

40

25

FIG. 9 is a top perspective view of one embodiment of an insertion tool of the present invention.

45

FIG. 10 is a side perspective view of the tool of FIG. 9.

30

FIG. 11 is a perspective view of a spacer engaging element of an insertion tool.

50

55

5

7

10

FIG. 12 is a perspective view of a spacer engaging element of an insertion tool.

5

FIG. 13 is a side elevational view of an insertion tool engaged to a spacer.

15

FIG. 14 is a top perspective view of the view shown in FIG. 13.

20

10

FIG. 15 is an exploded side perspective view of a tool-spacer assembly of the present invention.

25

FIG. 16 is a side perspective view of a tool-spacer assembly.

15

FIG. 17 is a top perspective view of a fastener of an insertion tool.

30

FIG. 18 is a top elevational view of the fastener of FIGS. 16 and 17.

FIG. 19 is a side elevational view of the fastener of FIG. 17.

35

20

FIG. 20 is a top elevational view of an implant system of the present invention implanted within an intervertebral space via an anterior surgical approach.

40

25

FIG. 21 is a top elevational view of another implant system described herein implanted within an intervertebral space via an anterior surgical approach.

45

50

55

5

8

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

10

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated device, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

5

15

20

10

25

15

30

35

40

25

45

30

50

This invention provides interbody fusion spacers having side-openings preferably along with features allowing them to nest within each other, thus allowing close placement of one or more, typically a pair of, spacers within the intervertebral space. These spacers are advantageous for exposure of vertebral tissue to osteogenic material within the interior cavities. The design of these spacers conserves material without compromising biomechanical properties of the spacer, while allowing packing of the spacer with autologous bone chips or another suitable osteogenic or osteoconductive material through a side wall thereof. Accordingly, in one aspect of the invention, inventive interbody fusion spacers are provided that include discontinuities in side walls thereof, and preferably also that are configured for nesting with adjacent spacers. In other aspects of the invention, interbody fusion implant systems are provided that may include an interbody fusion spacer nested within another spacer, including one of the inventive interbody fusion spacers of the present invention. Other aspects of the invention include methods of promoting fusion bone growth in the space between adjacent vertebrae as well as inventive tools for placement of the spacers of the present invention.

Referring now to FIGS. 1 and 3, one embodiment of an interbody fusion spacer 1100 is shown. Spacer 1100 includes a body 1110 that is generally cylindrical in shape. Body 1110 includes an outer surface 1150, an end 1120 that defines end wall 1121 and an end 1130 that defines end wall

55

5

9

1131. Body 1110 further includes side wall 1140 that connects end 1120 and end 1130.

10

Body 1110 is generally hollow, defining a hollow interior cavity, or chamber, 1113. Osteogenic and/or osteoconductive material, as further

5 described below, may advantageously be placed in interior cavity 1113. As

15

further seen in FIG. 1, side wall 1140 defines an opening 1160, such as a side-access opening, to interior cavity 1113 in a side of body 1110. Interior cavity 1113 is in communication with opening 1160. Opening 1160 may thus provide access to interior cavity 1113 before or after implantation or can

20

10 facilitate insertion of spacer 1100 into the intervertebral space. Due to the presence of the side-access opening 1160 of body 1110, its end walls can be optionally substantially closed, fixed and non-removable. For example, such end walls can be integral with the side walls. It is preferred that the wall that is inserted first into the intervertebral space, such as end wall 1131, is closed

25

15 and may be positioned to protect the spinal cord from escape or leakage of any osteogenic material from interior cavity 1113 when the spacer is placed by an anterior approach.

30

As can further be seen in FIG. 1, at least one of the ends is advantageously configured for nesting with an adjacent spacer. In one preferred form of the invention, each of the ends has a concave discontinuity 1118. As can further be seen in FIG. 1, opening 1160 is further defined by discontinuity 1119 extending along the length of body 1110. The discontinuities advantageously expose surfaces that are configured to receive a surface of an adjacent spacer having a complimentary exterior profile. For example, the discontinuities may expose concave surfaces 1116 and 1117 of end walls 1121 and 1131, respectively. Nesting between adjacently-placed spacers may occur by having concave surfaces 1116 and 1117 receive an outer concave surface of an adjacent spacer. The ends are therefore configured such that when at least one of the spacers having a discontinuity is

35

40

25 combined with another spacer to form an implant system, the width  $W_s$  of the

45

50

55

5

10

implant system is typically less than the sum of the combined maximum diameters  $D_M$ ,  $D_M$  of the individual spacers, as best seen in FIG. 6.

10

In the preferred device, the discontinuity 1118 in the end walls of body 1100 will span at least about 10% of the circumference of the body 1100,

5 more preferably at least about 20% of the circumference. Discontinuity 1118 will preferably not exceed about 50% of the circumference of the body, more preferably not exceeding about 40% of the circumference.

15

Thus, where the body is substantially circular in cross section as shown, end walls 1121 and 1131 and side wall 1140 will have external surfaces defining an external profile in the shape of an arc of a circle, extending no greater than about 324° around the circle (90% of the circumference), more preferably no greater than about 288° around the circle (80% of the circumference). Correspondingly also, the arc defined by the end walls and side walls will preferably not be less than about 180° (50% of the circumference), and more preferably not less than about 216°. In the preferred devices, the remaining external profile of the end walls define a concave surface, configured for nesting with an adjacent spacer.

20

10

25

15

30

Discontinuity 1119 along the length of the body, which preferably extends substantially parallel to the longitudinal axis of body 1110, will preferably span at least about 50% of the length of the body, more preferably at least about 80%, and will most preferably span substantially the entire length of the side wall 1140. Moreover, the circumferences of the side wall and end walls desirably extend uniformly along the length of the body. Furthermore, in a preferred device, the side wall and end walls extend about the circumference of body 1110 to substantially the same extent.

35

20

40

25

Body 1110 further preferably includes a plurality of smaller openings 1115 for bone ingrowth. Openings 1115 preferably extend from outer surface 1150 of body 1110 into interior cavity 1113.

45

The spacers of the invention are typically sized, or configured, to fit within an intervertebral space. One skilled in the art is aware that the size will

50

55

depend on the specific circumstances, including the size of the recipient and the location in the spine into which the spacers will be positioned.

The spacers of the invention may be provided with surface features defined in outer surface 1150. A wide variety of surface features are contemplated. In one form of the invention, end 1120 is a tool engagement end that defines a tool engaging or instrument attachment hole 1111 as seen in FIG. 1. In a preferred embodiment, hole 1111 is threaded but any suitable configuration is contemplated.

Spacers of the present invention may further include a tool-engaging slot 1112 for receiving an implantation tool. The slot is typically perpendicular to the central longitudinal axis  $A_L$  of spacer 1100. In yet other embodiments, slot 1112 may form an alignment score mark or groove 1112' defined in tool engagement end 1120' of spacer 1100' as seen in FIG. 2, thus making the opposite end, where end wall 1130' is located, the insertion end. Spacer 1100' is identical in all respects to spacer 1100, except for the difference in the feature present on the end walls. Thus, components of spacer 1100' are numbered correspondingly to those of spacer 1100, except with a denoting prime ( ' ) symbol. Alternatively, a projection may be formed on the end walls instead of a slot. Such a projection may form a straight, flat-sided shape (such as a mirror image of the slot depicted in FIG. 1), an elliptical eminence, a bi-concave eminence, a square eminence, or any other protruding shape which provides sufficient end-cap or tool engaging end strength and drive purchase to allow transmission of insertional torque without breaking or otherwise damaging the eminence.

Yet other surface features can be defined along the length L of the spacer. Referring again to FIGS. 1 and 3, outer surface of spacer 1100 may defines threads 1114 as illustrated, and/or other expulsion-resisting proturbances. The threads may be made by methods and tools well known in the art. The threads provide many advantages. For example, the thread feature increases postoperative stability of the spacer by engaging the adjacent vertebral endplates and anchoring the spacer to prevent expulsion.

5

12

The threads also stabilize the bone-spacer interface and reduce micromotion to facilitate fusion.

10

Interior cavity 1113 may be packed with any suitable osteogenic or osteoconductive material. In a preferred embodiment, the material M is sized so that it will contact the endplates of the adjacent vertebrae when the spacer is implanted within the vertebrae. This provides better contact of the composition with the endplates to stimulate bone ingrowth. Osteogenic material may advantageously be disposed in interior cavity 1113 through side-access opening 1160. Thus, opening 1160 is preferably sized to allow passage of osteogenic material into the interior cavity, or chamber 1113.

15

20

10

Any suitable osteogenic or osteoconductive material or composition is contemplated, including autograft, allograft, xenograft, demineralized bone, synthetic and natural bone graft substitutes, such as bioceramics, polymers, and osteoinductive factors. The terms osteogenic material or osteogenic composition as used herein mean virtually any material that promotes bone growth or healing including autograft, allograft, xenograft, bone graft substitutes and natural, synthetic and recombinant proteins, hormones and the like.

25

15

30

Autograft can be harvested from locations such as the iliac crest using drills, gouges, curettes, trephines and other tools and methods which are well known to surgeons in this field. Preferably, autograft is harvested from the iliac crest with a minimally invasive donor surgery. The osteogenic material may also include bone reamed away by the surgeon while preparing the end plates for the spacer.

35

40

Advantageously, where autograft is chosen as the osteogenic material, only a very small amount of bone material is needed to pack the chamber. The autograft itself is not required to provide structural support as this is provided by the spacer. The donor surgery for such a small amount of bone is less invasive and better tolerated by the patient. There is usually little need for muscle dissection in obtaining such small amounts of bone. The present

45

30

50

55



5

13

invention therefore eliminates or minimizes many of the disadvantages of employing autograft.

10

Natural and synthetic graft substitutes which replace the structure or function of bone are also contemplated for the osteogenic composition. Any

5 such graft substitute is contemplated, including for example, demineralized

15

bone matrix, mineral compositions and bioceramics. As is evident from a review of *An Introduction to Bioceramics*, edited by Larry L. Hench and June Wilson (World Scientific Publishing Co. Ptd. Ltd, 1993, volume 1), there is a vast array of bioceramic materials, including BIOGLASS<sup>®</sup>, hydroxyapatite and

20

10 calcium phosphate compositions known in the art which can be used to advantage for this purpose. That disclosure is herein incorporated by reference for this purpose. Preferred compositions include bioactive glasses, tricalcium phosphates and hydroxyapatites. In one embodiment, the graft substitute is a biphasic calcium phosphate ceramic including tricalcium

25

15 phosphate and hydroxyapatite.

30

In some embodiments, the osteogenic compositions used in this invention may comprise a therapeutically effective amount to stimulate or induce bone growth of a substantially pure bone inductive or growth factor or protein in a pharmaceutically acceptable carrier. The preferred osteoinductive

35

20 factors are the recombinant human bone morphogenetic proteins (rhBMPs) because they are available in unlimited supply and do not transmit infectious diseases. Most preferably, the bone morphogenetic protein is a rhBMP-2, rhBMP-4 or heterodimers thereof.

40

Recombinant BMP-2 can be used at a concentration of about 0.4

25 mg/ml to about 1.5 mg/ml, preferably near 1.5 mg/ml. However, any bone

45

morphogenetic protein is contemplated including bone morphogenetic proteins designated as BMP-1 through BMP-13. BMPs are available from Genetics Institute, Inc., Cambridge, Massachusetts and may also be prepared by one skilled in the art as described in U.S. Patent Nos. 5,187,076 to

30 Wozney et al.; 5,366,875 to Wozney et al.; 4,877,864 to Wang et al.;

50

5,108,922 to Wang et al.; 5,116,738 to Wang et al.; 5,013,649 to Wang et al.;

55

5

14

10

5,106,748 to Wozney et al.; and PCT Patent Nos. WO93/00432 to Wozney et al.; WO94/26893 to Celeste et al.; and WO94/26892 to Celeste et al. All osteoinductive factors are contemplated whether obtained as above or isolated from bone. Methods for isolating bone morphogenetic protein from bone are described, for example, in U.S. Patent No. 4,294,753 to Urist and Urist et al., 81 PNAS 371, 1984.

15

20

The choice of carrier material for the osteogenic composition is based on biocompatibility, biodegradability, mechanical properties and interface properties as well as the structure of the load bearing member. The particular application of the compositions of the invention will define the appropriate formulation. Potential carriers include calcium sulphates, polylactic acids, polyanhydrides, collagen, calcium phosphates, polymeric acrylic esters and demineralized bone. The carrier may be any suitable carrier capable of delivering the proteins. Most preferably, the carrier is capable of being eventually resorbed into the body. One preferred carrier is an absorbable collagen sponge marketed by Integra LifeSciences Corporation under the trade name Helistat<sup>®</sup> Absorbable Collagen Hemostatic Agent. Another preferred carrier is a biphasic calcium phosphate ceramic. Ceramic blocks are commercially available from Sofamor Danek Group, B. P. 4-62180 Rang-du-Fliers, France and Bioland, 132 Rou d Espangne, 31100 Toulouse, France. The osteoinductive factor is introduced into the carrier in any suitable manner. For example, the carrier may be soaked in a solution containing the factor.

30

35

40

In another aspect of the invention, an interbody fusion implant system is provided. The system includes one of the inventive spacers described above, along with either another of the inventive spacers, or with other spacers known to the art. Referring now to FIGS. 4-6, implant system 1300 may include spacer 1100 combined with an adjacent spacer 1200 to provide a nested implant system. Spacer 1200 is of a design similar to that of spacer 1100 having all the features thereof, except it does not have the wall discontinuities. Thus, spacer 1200 preferably has either a removable or non-

45

30

50

55

5

15

10

15

20

removable end wall, or cap, 1221, more preferably in the tool engaging end 1220. Moreover, spacer 1200 may include, for example, instrument attachment hole 1211, tool engaging slot 1212, side wall 1240, outer surface 1250, openings 1215 for bone ingrowth, end walls 1221 and 1231, internal cavity 1213 and threads 1214. It is also seen that the width  $W_s$  of system 1300 is less than the sum of the maximum diameter  $D_M$  of spacer 1100 and the maximum diameter  $D_M$  of spacer 1200. Such is the preferred configuration present in the implant systems described herein. In yet other forms of the invention as depicted in FIG. 7, two spacers 1100 can be placed adjacent to one another to provide implant system 1400.

25

30

In yet another embodiment, two spacers 1100 can optionally be aligned such that the side-wall openings 1160 face one another as seen in FIG. 8, thus forming implant system 1400'. The spacers of the invention can be formed of any suitable biocompatible material, including metals, ceramics, polymers, composites, and alloys. A preferred material includes metals, including metal alloys. Some embodiments include titanium, stainless steel, and Hedrocel®.

35

The spacers described herein may be conveniently implanted with known instruments and tools. Any instrument which will firmly hold the implant and permit the implant to be inserted is contemplated. Preferably, the instrument will be adapted to compensate for the open structure of the inventive spacers described herein.

40

Accordingly, yet another aspect of the invention provides insertion devices for facilitating the implantation of spacers, implants and osteogenic material. The tools include spacer engaging means for engaging a spacer or other item and occlusion means for blocking an opening defined in the spacer.

45

50

Referring now to FIGS. 9-12, one embodiment of an insertion tool 800' is provided which includes a housing 805' having a proximal end 806' and an opposite distal end 807' and defining a passageway 810' between the two ends. A shaft 815' which has a first end 816' and an opposite second end 817' is disposed within the passageway 810'. The first end 816' of the shaft

55

5

16

10

815' is adjacent the distal end 807' of the housing 805'. The first end 816 defines a spacer engager 819'. An occlusion member 820' is attached to the housing 805'.

15

The spacer engager 819' has any configuration which will engage a spacer. In some embodiments the spacer engager 819' includes a post 818' as shown in FIG. 11 for engaging a hole in the spacer. The post 818' may have any configuration which will provide for mating engagement with a hole in a spacer. For example, in preferred embodiments, the engager 819' is threaded as shown in Figure 11 to matingly engage a threaded tool hole. Other embodiments include sharply pointed tip 819' as shown in Figure 9 or a hexagonal shaped tip 819' as shown in FIG. 12. In each case, the engager is shaped and sized to mate engagingly with the tool hole of the spacer. In other embodiments, the spacer engaging means is a pair of prongs having opposite facing spacer engaging members for grasping an outer surface of the spacer.

20

25

15

30

35

The spacer insertion tool 800' also includes an occlusion member 820' for blocking an opening defined in the spacer when the spacer engager 819' is engaged to the spacer. In a preferred embodiment, the occlusion member 820' is extendible from the distal end 807' of the housing 805' for blocking an opening in the spacer. As shown in Figure 13, the occlusion member 820' closes the opening 1160 to interior cavity 1113 of spacer 1100.

40

The occlusion member 820' is preferably slideably engaged to the housing 805'. Referring now to Figure 14, in one embodiment, the occlusion member 820' includes a plate 821' which defines a groove 822'. A fastener 830' is engaged to a fastener bore 809' (seen in FIG. 10) in the housing 805' and the groove 822' is disposed around the fastener 830'. In this way, the plate 821' is slideable relative to the housing 805'.

45

As shown in FIG. 15, the housing 805' is preferably provided with a recess 808' which is defined to accept the occlusion member 820' without increasing the effective diameter of the device 800'. The occlusion member is also adapted for the best fit with the spacer. For example, the interior surface

50

55

5

17

10

15

20

25

30

35

40

45

50

55

824' of the occlusion member is preferably curved to complement the concave-shaped discontinuity of the inventive spacers described herein.

Referring now to FIGS. 15 and 16, the plate 821' of the occlusion member 820' preferably includes a curved superior surface 825' which approximates and completes the minor diameter of spacer 1100 when the spacer engager 819' is engaged to the tool engaging hole 1111 and the occlusion member 820' is blocking opening 1160 of spacer 1100. Preferably, the plate 821' and the end walls 1121 and 1131 of spacer 1100 will be configured such that curved superior surface 825' will not increase the maximum diameter  $D_M$  of the threaded outer surface 1150 when the tool is engaged to the spacer. This facilitates rotation and screw insertion of the spacer and occlusion member combination into an intervertebral space. The occlusion member 820' preferably has an interior surface 824' which is convexly curved to complement the concave surfaces of end walls 1121 and 1131 of spacer 1100. Correspondingly, recess 808' of insertion tool 800' has a concave surface complementary to convexly curved surface 824' of occlusion member 820'. Further, occlusion member 820' is of a length and design sufficient to span to the distal end of the engaged spacer 1100, as depicted in Figure 13. Occlusion member 820' can also have a beveled outer end as depicted, or an otherwise smoothed outer end, to facilitate rotary insertion.

The tool 800' depicted in Figure 9 also includes a handle portion 840'. The handle portion includes means for slidingly moving the shaft 815' within the housing 805' and for rotating the post 818'. In the embodiment shown in FIGS. 9 and 10 the means includes a thumbwheel 841'. In some embodiments, the handle portion 840' has a Hudson end attachment 842'.

Referring now to FIGS. 17-19, the fastener 830' is preferably provided with a housing engaging means shown in FIG. 17 as a post 834', and a plate engaging means or head portion 835'. The fastener 830' preferably includes an internal hex 837' for receiving a fastener driving tool. The post portion 834' may be threaded for mating engagement with threaded bore 809' in the housing 805'. In preferred embodiments shown in FIGS. 14 and 16, the plate

5

18

10

15

20

25

30

35

40

45

50

55

821' defines a recess 826 surrounding the groove 822'. The diameter  $d_1$  of the head portion 835 is greater than the diameter  $d_2$  of the post 834'. The diameter  $d_2$  is less than the width  $w_1$  of the groove 822'. The diameter  $d_1$  of the head portion is greater than width  $w_1$  but preferably no greater than the distance  $w_2$  between the outer edges 827' of the recess 826'. Thus, the head portion 835' of the fastener 830 can rest on the recess 826 while the post portion 834' extends through the groove 822'. In this way, plate 821' is slidable relative to the housing 805'. This also provides for a low profile device which can be inserted into various cannula for percutaneous procedures.

The spacers and tools in this invention can be conveniently incorporated into known surgical, preferably minimally invasive, procedures. The spacers of this invention can be inserted using laparoscopic technology as described in Sofamor Danek USA's Laparoscopic Bone Dowel Surgical Technique, 1995, 1800 Pyramid Place, Memphis, Tennessee 38132, 1-800-933-2635, preferably in combination with the insertion tool 800' of this invention.

The combination of spacers of this invention with the tools of this invention allow the spacers to provide the benefits of a nestable spacer without suffering any biomechanical disadvantage. The occlusion member 825' blocks the side-opening of the spacer to lessen the stress on the wall of the spacer for smooth insertion. The occlusion member also allows the chamber, or interior cavity, to be packed with osteogenic material before the spacers are implanted. In some procedures, two open spacers are packed with their side-openings facing one another as depicted in Figure 8. The side-opening of the spacers, along with the tools described herein, allow the spacers to be packed closely together because virtually no clearance is required for the insertion tool. The side-opening also allows the interior cavity to be packed after the spacer is implanted.

In other aspects of the invention, methods of promoting fusion bone growth in the space between adjacent vertebrae are provided. In one form of

5

19

10

15

20

25

30

35

40

the invention, the method includes providing a first interbody fusion spacer described herein, such as one in which each end has a surface for nesting with an adjacent spacer and having a first side wall defining an opening to the interior cavity in a side of the spacer body. The spacer selected is of the appropriate dimensions, based on the size of the cavity created and the needs of the particular patient undergoing the fusion. The adjacent vertebrae are prepared to receive the spacer in an intervertebral space between adjacent vertebrae according to conventional procedures. The spacer is mounted on an instrument, preferably via an instrument attachment hole. An osteogenic material may optionally be placed within the cavity of the spacer and the opening of the spacer is then blocked with an occlusion member of the instrument. The spacer is then inserted into the cavity created between the adjacent vertebrae to be fused. Once the spacer is properly oriented within the intervertebral space, the occlusion member of the instrument can be withdrawn from the spacer aperture and the spacer engager is disengaged from the spacer. In a preferred form of the invention, a second spacer is inserted into the intervertebral space after the first spacer is properly positioned near vertebral body V, resulting in bilateral placement of the spacers as seen in FIG. 20. The second spacer may be the same as the first spacer, as seen in FIG. 20 with two spacers 1100 that form implant system 1400, or may be any other spacer described herein or other appropriate spacer known in the art. To this end, implant systems 1300, 1400, or 1500, for example, may be advantageously used in the present invention. Osteogenic material may also optionally be placed within those spacers having chambers therein.

45

Bilateral placement has many advantages. For example, bilateral placement results in improved spinal support with two spacers that fit properly within the disc space. Moreover, such positioning allows for a substantial area for placement of osteogenic material which will facilitate boney bridging across the disc space, especially when the spacers are positioned with their

50

55

5

20

side wall openings facing each other as seen in FIG. 21 with spacers 1100 that form implant system 1400'.

10

It should be understood that the embodiments described herein are for illustrative purposes only and that various modifications or changes in light thereof will be suggested to persons skilled in the art and are to be included within the spirit and purview of this application and the scope of the appended claims.

15

20

25

30

35

40

45

50

55



## Claims

5

10

15

20

25

30

35

40

45

50

55

5

21

## CLAIMS

10

What is claimed is:

5

1. An interbody fusion spacer, comprising:

15

an elongated body having a first end, a second end, an outer surface and a side wall connecting said first end and said second end, said elongated body defining an interior cavity;

20

at least one of said first end and said second end having an end wall discontinuity configured for nesting with an adjacent spacer; and said side wall defining a side wall opening to said interior cavity in a side of said elongated body.

25

2. The spacer of claim 1, wherein said body is comprised of metal.

15

30

3. The spacer of claim 1, wherein said body is generally cylindrical in shape.

35

4. The spacer of claim 1, wherein said outer surface defines threaded bone-engaging portions.

40

5. The spacer of claim 1, wherein said side wall defines a plurality of openings for bone ingrowth extending from said outer surface into said internal cavity.

25

45

6. The spacer of claim 1, wherein one of said ends comprises a tool engaging end defining a tool engaging hole for receiving a driving tool for implanting the spacer.

50

7. The spacer of claim 1, further comprising an osteogenic material disposed within said cavity.

55

5

22

10

8. The spacer of claim 7, wherein said osteogenic material comprises demineralized bone, a calcium phosphate material, a bioceramic, bioglass, an osteoinductive factor and mixtures thereof.

5

15

9. The spacer of claim 1, wherein said side wall opening is defined by a side wall discontinuity in said side wall that extends over at least about 10% of the circumference of said body but not exceeding about 50% of the circumference of said body.

20

10

10. The spacer of claim 9, wherein said side wall discontinuity extends over at least about 20% of the circumference of said body but not exceeding about 40% of the circumference of said body.

25

15

11. The spacer of claim 1, wherein said side wall opening is defined by a side wall discontinuity that extends over at least about 50% of the length of said body.

30

20

12. The spacer of claim 11, wherein said side wall discontinuity extends over at least about 80% of the length of said body.

35

13. The spacer of claim 1, wherein said side wall opening is sized to allow passage of osteogenic material into said interior cavity.

40

25

14. The spacer of claim 1, wherein said end wall discontinuity defines a concave surface.

45

15. The spacer of claim 1, wherein said end wall discontinuity is configured for nesting with an adjacent spacer.

30

50

55

5

23

10

16. The spacer of claim 1, comprising a side wall discontinuity aligned with said end wall discontinuity, said side wall discontinuity extending along the length of said body to define said opening in a side of said body.

15

5 17. The spacer of claim 1, having a concave end wall discontinuity at each of said first and second ends, and wherein each of said ends is configured to receive an outer convex surface of an adjacent spacer.

20

10 18. The spacer of claim 1, wherein each of said ends are configured for nesting with an adjacent spacer to form a spacer assembly having a width less than the sum of the combined maximum diameters of said spacers.

25

30

35

40

15 19. An interbody fusion spacer, comprising:  
an elongated body having a circumference, a first end defining a first end wall, a second end defining a second end wall, an outer surface and a side wall connecting said first end and said second end, said elongated body defining an interior cavity, at least one of said end walls having a discontinuity configured for nesting with an adjacent spacer; said side wall defining a discontinuity extending along a length of said body, said discontinuity in said side wall defining an opening in communication with said interior cavity, said discontinuity in side wall being at a location corresponding to said discontinuity in said end wall, and said discontinuity in said end wall and said discontinuity in said side wall both extending about said circumference of said body to substantially the same extent.

45

20 20. An interbody fusion implant system, comprising:  
a first interbody fusion spacer having a first elongated body having a first end, a second end, an outer surface and a side wall connecting said first end and said second end, said elongated body defining an interior cavity;

50

55

5

24

at least one of said first end and said second end having a discontinuity configured for nesting with an adjacent spacer,

10

said side wall defining an opening to said interior cavity in a side of said elongated body, said opening configured for loading said interior cavity with an osteogenic material; and

5

15

a second interbody fusion spacer having a second elongated body, said second elongated body having a third end, a fourth end, a second outer surface and a second side wall connecting said first end and said second end, said second interbody fusion spacer nestable within said first interbody fusion spacer.

20

10

21. The implant system of claim 20, wherein said first and second elongated bodies are comprised of metal.

25

15

22. The implant system of claim 20, wherein said first and second elongated bodies are generally cylindrical in shape.

30

23. The implant system of claim 20, wherein said first and second outer surfaces each independently define threaded bone-engaging portions.

20

35

24. The implant system of claim 20, wherein each of said elongated bodies further include a plurality of openings for bone ingrowth.

40

25

25. The implant system of claim 20, wherein one of said ends of said first body and one of said ends of said second body comprise a tool engaging end defining a tool engaging hole for receiving a driving tool for implanting the spacers.

45

26. The implant system of claim 20, further comprising an osteogenic material disposed within said first interior cavity.

30

50

55

5

25

10

27. The implant system of claim 26, wherein said osteogenic material comprises demineralized bone, a calcium phosphate material, a bioceramic, bioglass, an osteoinductive factor and mixtures thereof.

15

5 28. The implant system of claim 20, wherein said opening is defined by a discontinuity in said side wall over at least about 10% of the circumference of said body but not exceeding about 50% of the circumference of said first body.

20

10 29. The implant system of claim 28, wherein said discontinuity extends over at least about 20% of the circumference of said body but not exceeding about 40% of the circumference of said first body.

25

15 30. The implant system of claim 20, wherein said opening is defined by a discontinuity in said side wall extending over at least about 50% of the length of said first body.

30

31. The implant system of claim 30, wherein said discontinuity extends over at least about 80% of the length of said first body.

35

20 32. The implant system of claim 20, wherein said opening is sized to allow passage of osteogenic material into said first interior cavity.

40

25 33. The implant system of claim 20, wherein said second elongate body defines a second interior cavity.

45

34. An interbody fusion implant system, comprising:  
a first interbody fusion spacer having a first elongated body, said first elongated body having a circumference, a first end defining a first end wall, a second end defining a second end wall, a first outer surface and a first side wall connecting said first end and said second end, said first elongated

50

55

5

26

10

body defining a first interior cavity, at least one of said end walls having a discontinuity configured for nesting with an adjacent spacer, said discontinuity extending along a length of said body and into said side wall, said discontinuity in said side wall defining an opening in communication with said first interior cavity, said side wall having said discontinuity and said end wall having said discontinuity both extending about said circumference of said body to substantially the same extent; and

15

20

10

a second interbody fusion spacer having a second elongated body, said second elongated body having a third end, a fourth end, a second outer surface and a second side wall connecting said third end and said fourth end, said second interbody fusion spacer nestable within said first interbody fusion spacer.

25

15

35. The implant system of claim 34, wherein at least one of said ends of said first interbody fusion spacer and said second interbody fusion spacer comprise a tool engaging end defining a tool engaging hole for receiving a driving tool for implanting the spacers.

30

35

20

36. The implant system of claim 34, wherein said first interbody fusion spacer and said second interbody fusion spacer are comprised of metal.

40

25

37. The implant system of claim 34, wherein said first elongated body has a first plurality of openings for bone ingrowth extending from said first outer surface into said first internal cavity,

45

38. A spacer insertion tool, comprising:

a housing having a proximal end and an opposite distal end and defining a passageway between said proximal end and said distal end;

50

55

5

27

10

a shaft having a first end and an opposite second end, said shaft disposed within said passageway with said first end adjacent said distal end, said first end defining a spacer engager; and

15

an occlusion member extendible from said distal end of said housing for blocking an opening defined in the spacer when said spacer engager is engaged to the spacer, said occlusion member having an interior and exterior surface, at least one of said surfaces of said occlusion member being curved.

20

10 39. The spacer insertion tool of claim 38, wherein both of said surfaces of said occlusion member are curved.

25

40. A method of promoting fusion bone growth in the space between adjacent vertebrae, comprising:

15

(a) providing a first interbody fusion spacer having a first elongated body, said first elongated body having a first end, a second end, a first outer surface and a first side wall connecting said first end and said second end, said elongated body defining a first interior cavity;

30

at least one of said first end and said second end having a discontinuity configured for nesting with an adjacent spacer;

35

said first side wall defining an opening to said interior cavity in a side of said first elongate body;

40

a second interbody fusion spacer having a second elongated body, said second elongated body having a third end, a fourth end, a second outer surface and a second side wall connecting said first end and said second end, said second interbody fusion spacer nestable within said first interbody fusion spacer;

25

45

(b) preparing said adjacent vertebrae to receive the elongated body in an intervertebral space between adjacent vertebrae; and

30

(c) placing the first elongated body into the intervertebral space.

50

55



5

28

10

41. The method of claim 40, further comprising packing osteogenic material into said interior cavity of said first spacer prior to the placing step.

15

5 42. The method of claim 40, further comprising implanting a second spacer into the intervertebral space after the placing step.

20

10

43. The method of claim 42, further comprising orienting said second spacer so that it nests within said first spacer.

25

15

44. The method of claim 40, wherein said first and second interbody fusion spacers are comprised of metal.

30

15

45. The method of claim 40, wherein said first elongated body has a first plurality of openings for bone ingrowth extending from said first outer surface into said first interior cavity.

35

20

46. A method of promoting fusion bone growth in the space between adjacent vertebrae, comprising:

40

25

(a) providing a first interbody fusion spacer having a first elongated body, said first elongated body having a circumference, a first end defining a first end wall, a second end defining a second end wall, a first outer surface and a first side wall connecting said first end and said second end, said first elongated body defining a first interior cavity, at least one of said end walls having a discontinuity configured for nesting with an adjacent spacer, said discontinuity extending along a length of said body and into said side wall, said discontinuity in said side wall defining an opening in communication with said first interior cavity, said side wall having said discontinuity and said end wall having said discontinuity both extend about said circumference of said body to substantially the same extent;

50

55

5

29

10

(b) preparing said adjacent vertebrae to receive the elongated body in an intervertebral space between adjacent vertebrae; and  
(c) placing the first elongated body into the intervertebral space.

5

15

47. The method of claim 46, further comprising packing osteogenic material into said interior cavity of said first spacer prior to the placing step.

20

10

48. The method of claim 46, further comprising implanting a second spacer into the intervertebral space after the placing step.

25

49. The method of claim 48, further comprising orienting said second spacer so that it nests within said first spacer.

15

30

50. The method of claim 49, wherein said first and second interbody fusion spacers are comprised of metal.

35

20

51. The method of claim 50, wherein said first elongated body has a first plurality of openings for bone ingrowth extending from said first outer surface into said interior cavity.

40

25

52. An interbody fusion spacer, comprising:  
an elongate body having end walls and a side wall extending between said end walls, said side wall and said end walls defining an interior cavity;

45

30

said end walls each having an external profile comprising a first portion defining an arc of a circle, said arc extending from 180° to 324° around the circle; said external profile also comprising a second portion defining a concave surface;

50

55

5

30

10

said side wall having an external profile defining an arc of a circle, said arc extending from 180° to 324° around the circle and aligned with the arc defined by said end walls.

15

5 53. An interbody fusion spacer, comprising:

an elongate body having end walls and side walls extending between the end walls, said end walls and side walls defining an interior cavity for receiving an osteogenic substance;

20

10

said end walls non-removably fixed to said side walls; and

said side walls defining an opening configured for passage of an osteogenic substance into said cavity.

25

15

54. The interbody fusion spacer of claim 53, wherein said end walls are integral with said side walls.

30

55. The interbody fusion spacer of claim 53, wherein said body is a substantially cylindrical body.

35

20

56. The interbody fusion spacer of any of claims 53-55, wherein said side walls have surface features for resisting expulsion from an intervertebral space.

40

57. The interbody fusion spacer of claim 56, wherein said surface features comprise threads.

45

50

55



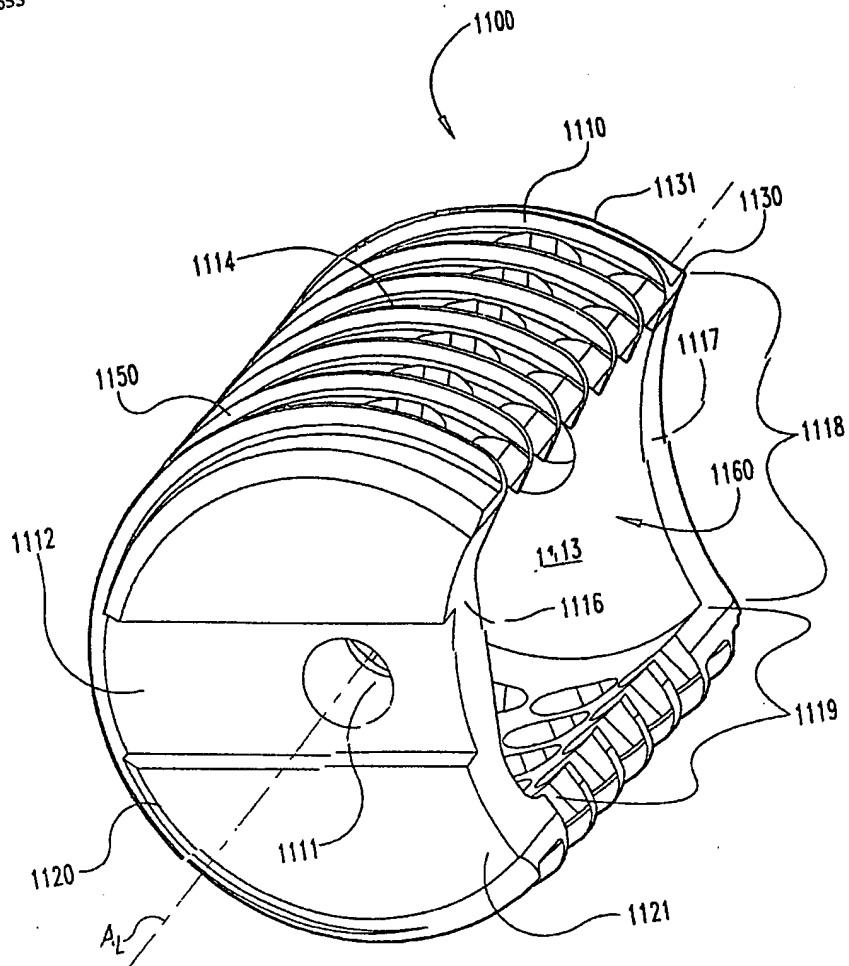



Fig. 1

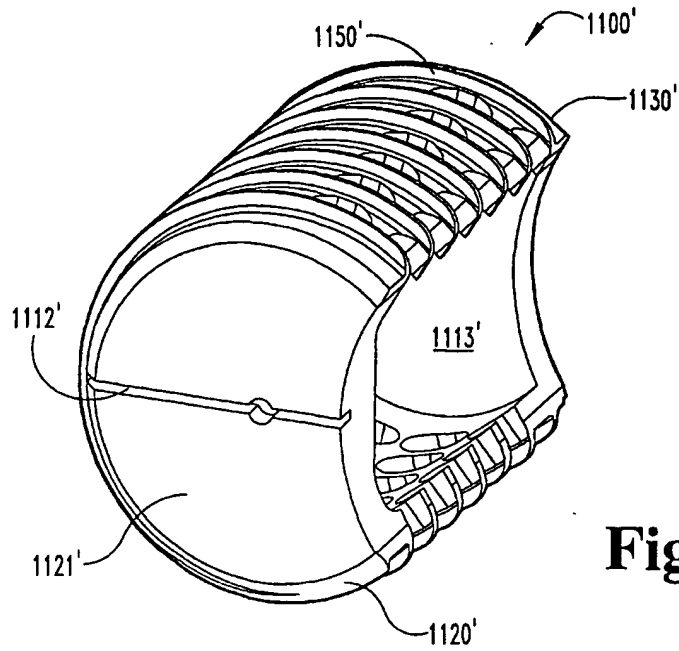



**Fig. 2**

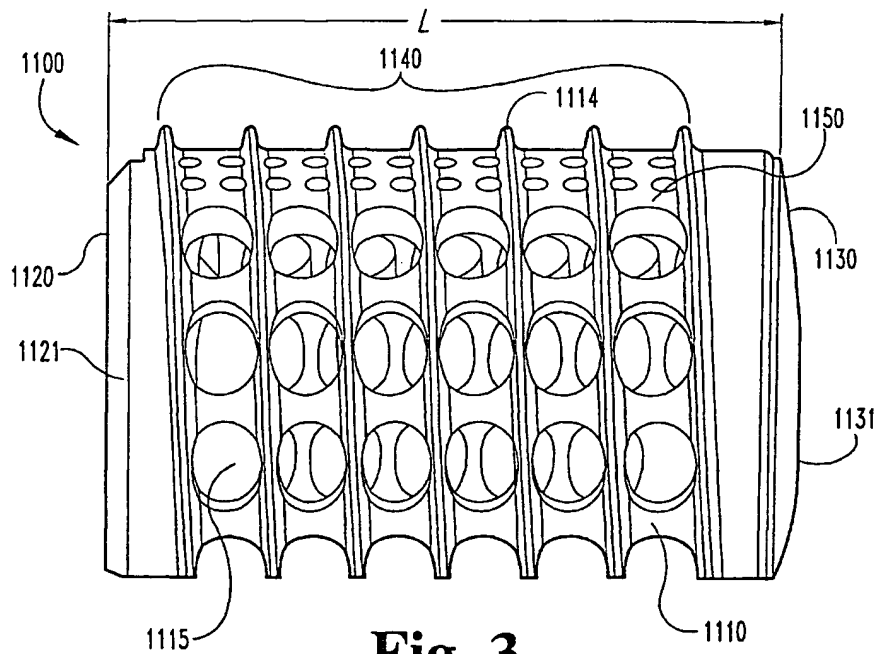

**Fig. 3**

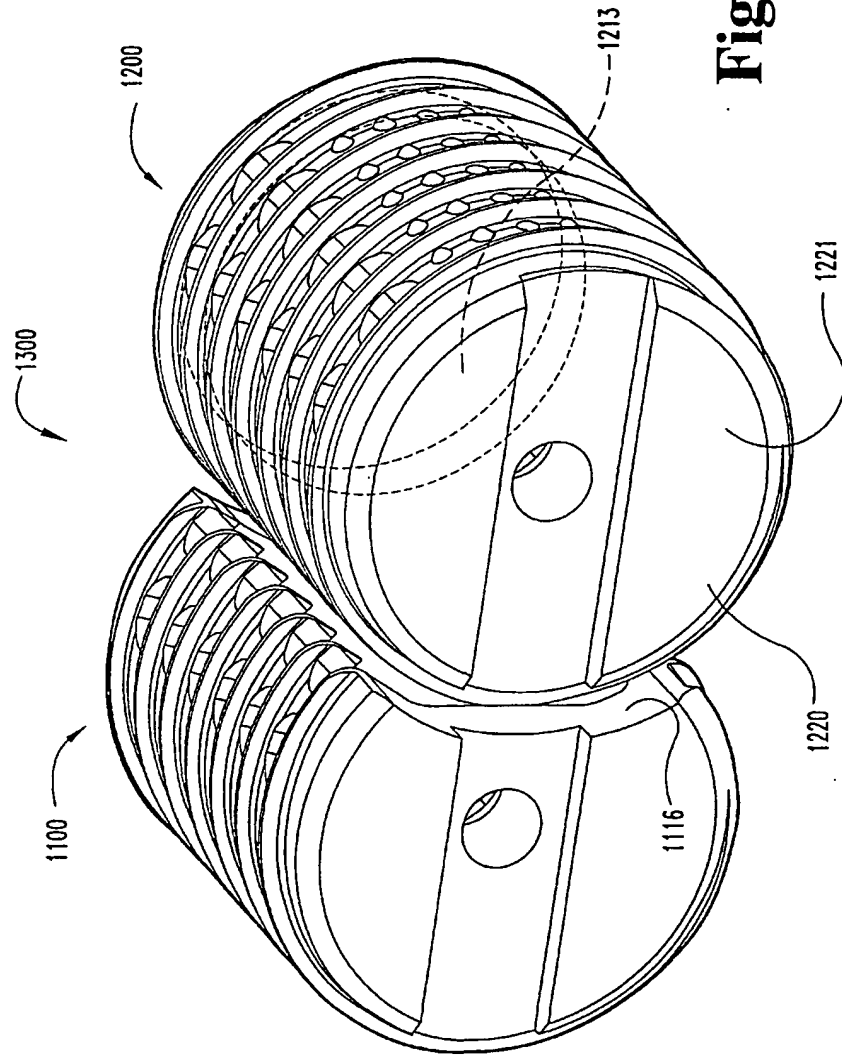

**Fig. 4**

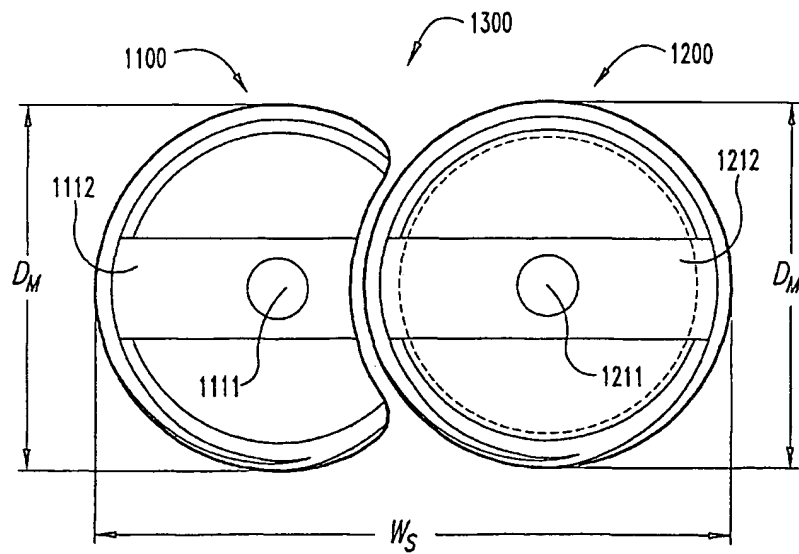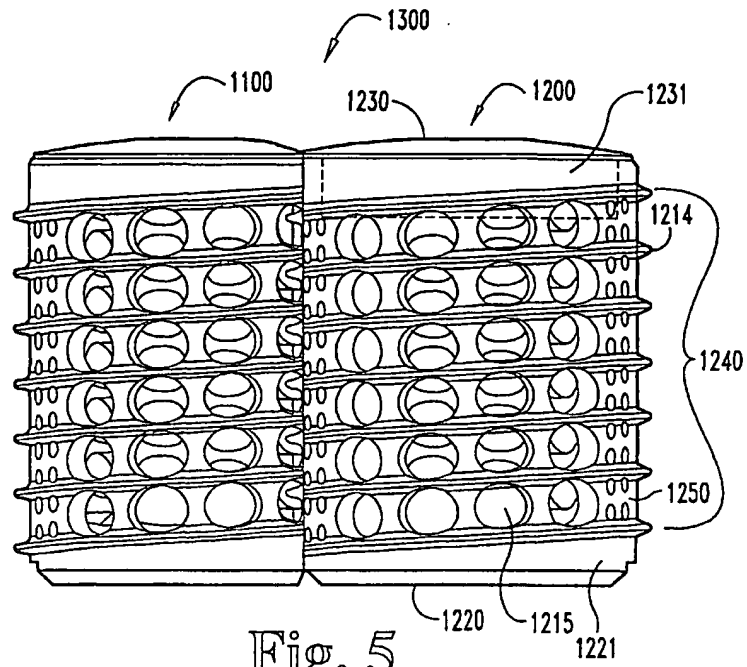

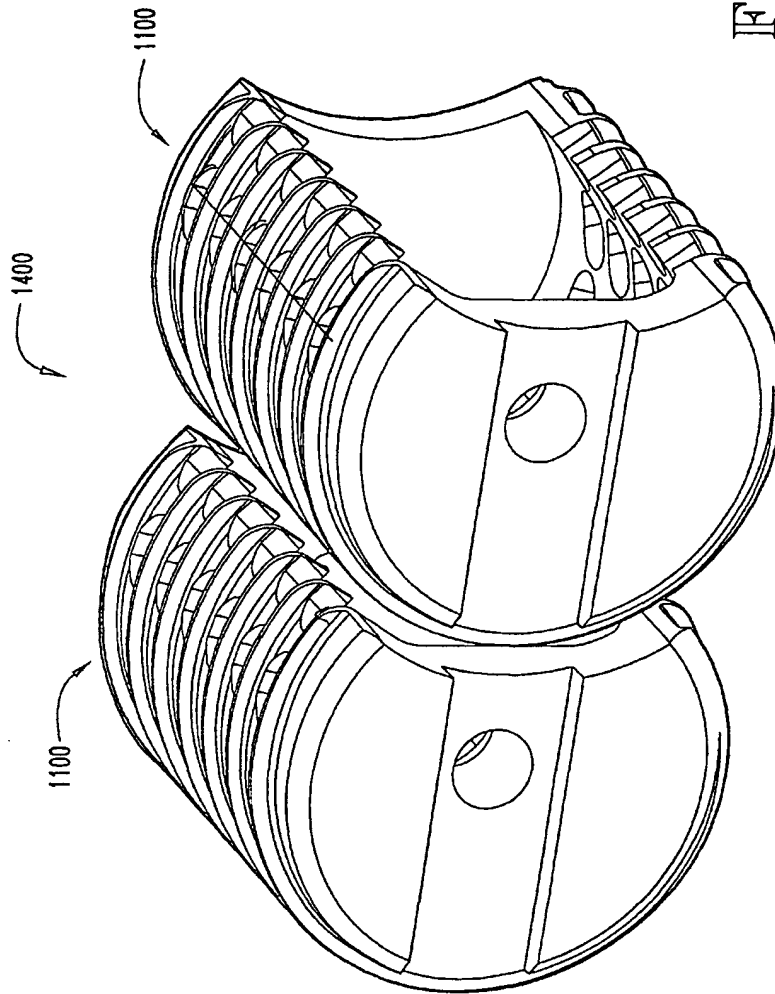
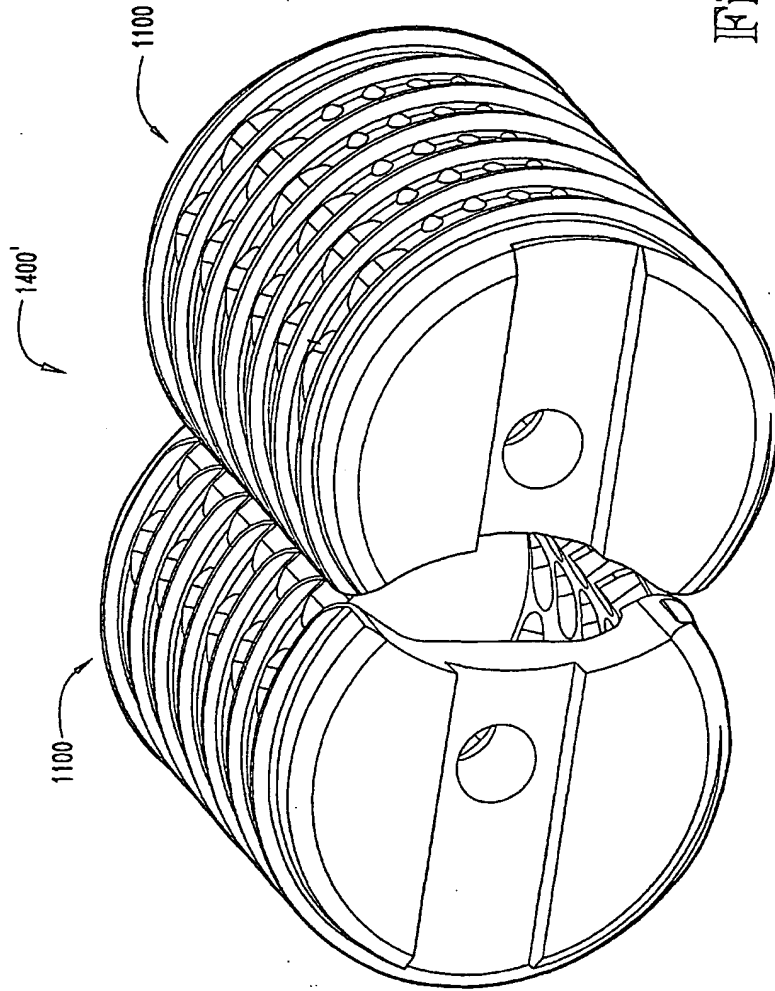
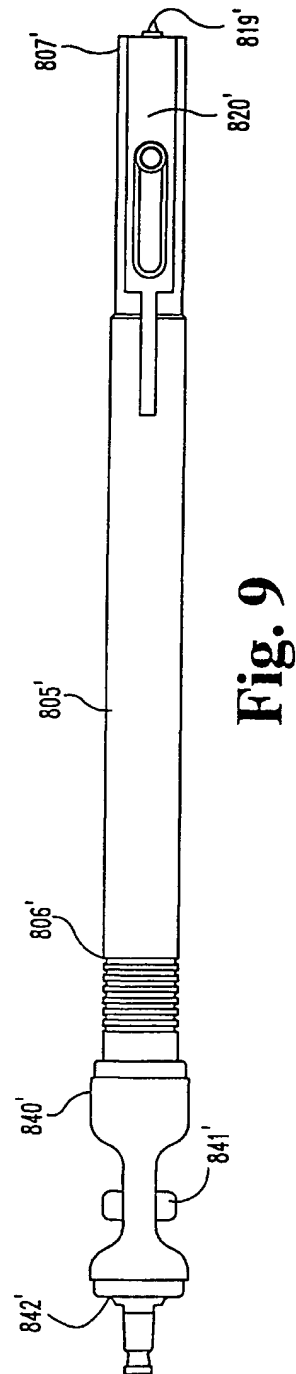
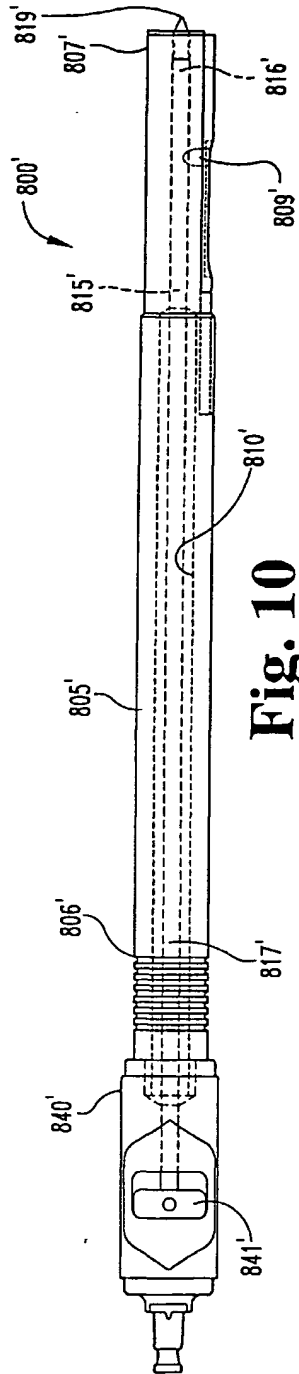


Fig. 7



Fig. 8





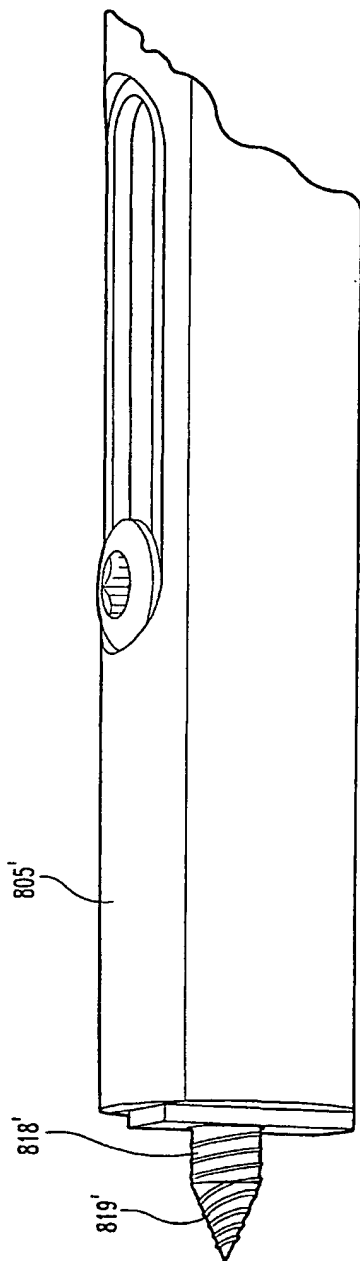


Fig. 11

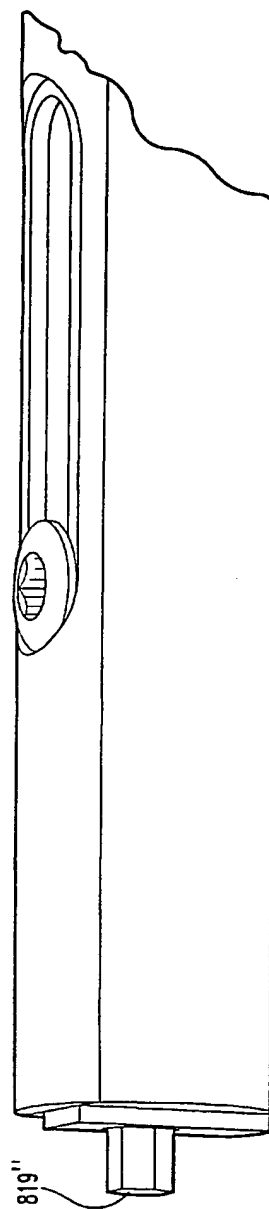


Fig. 12







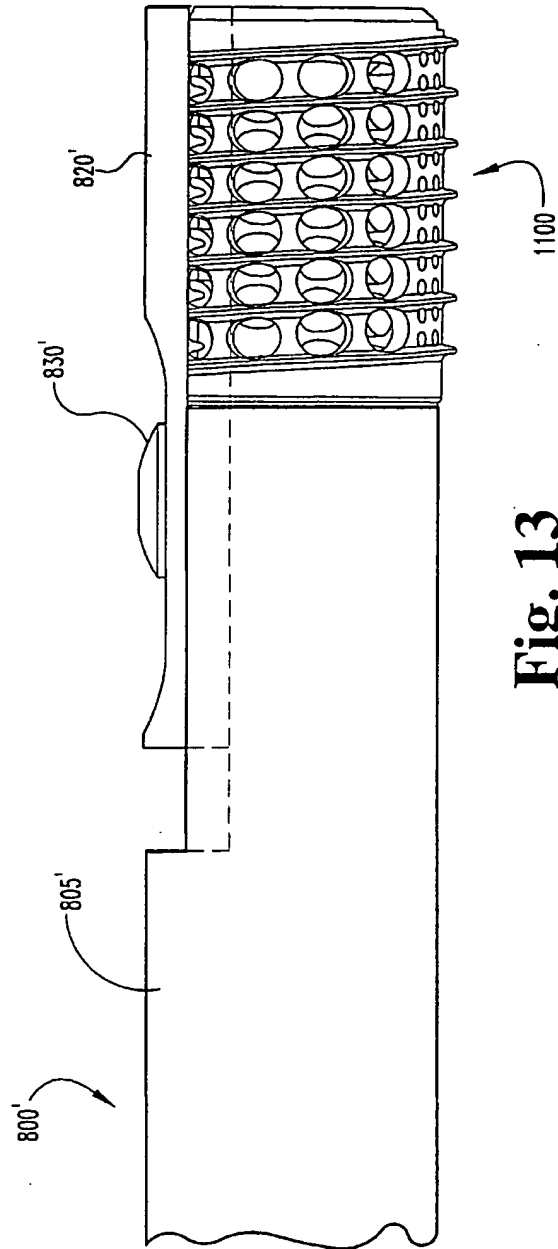



Fig. 13

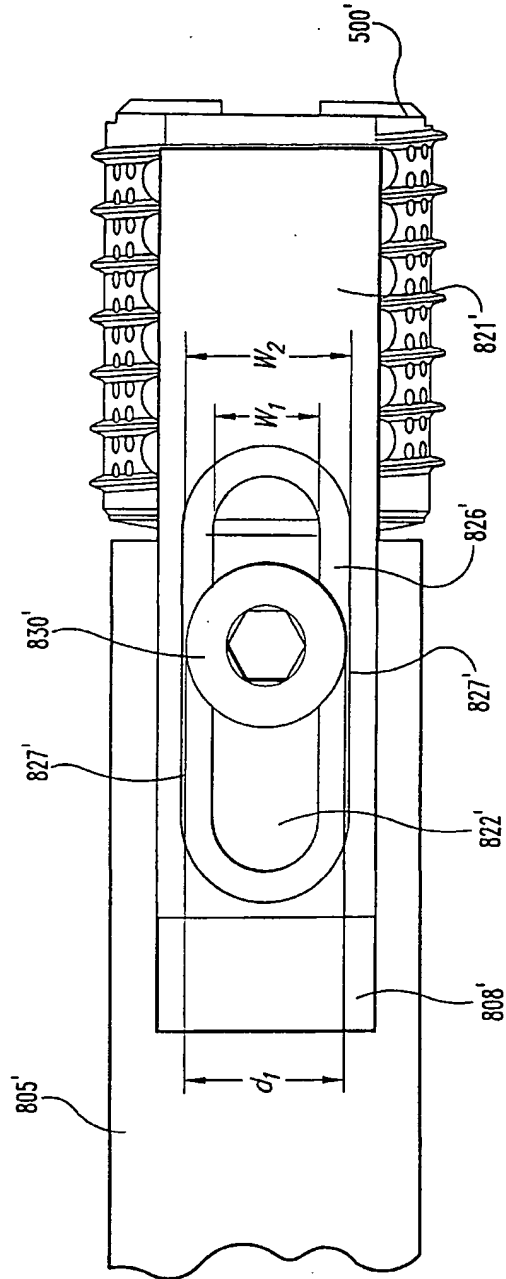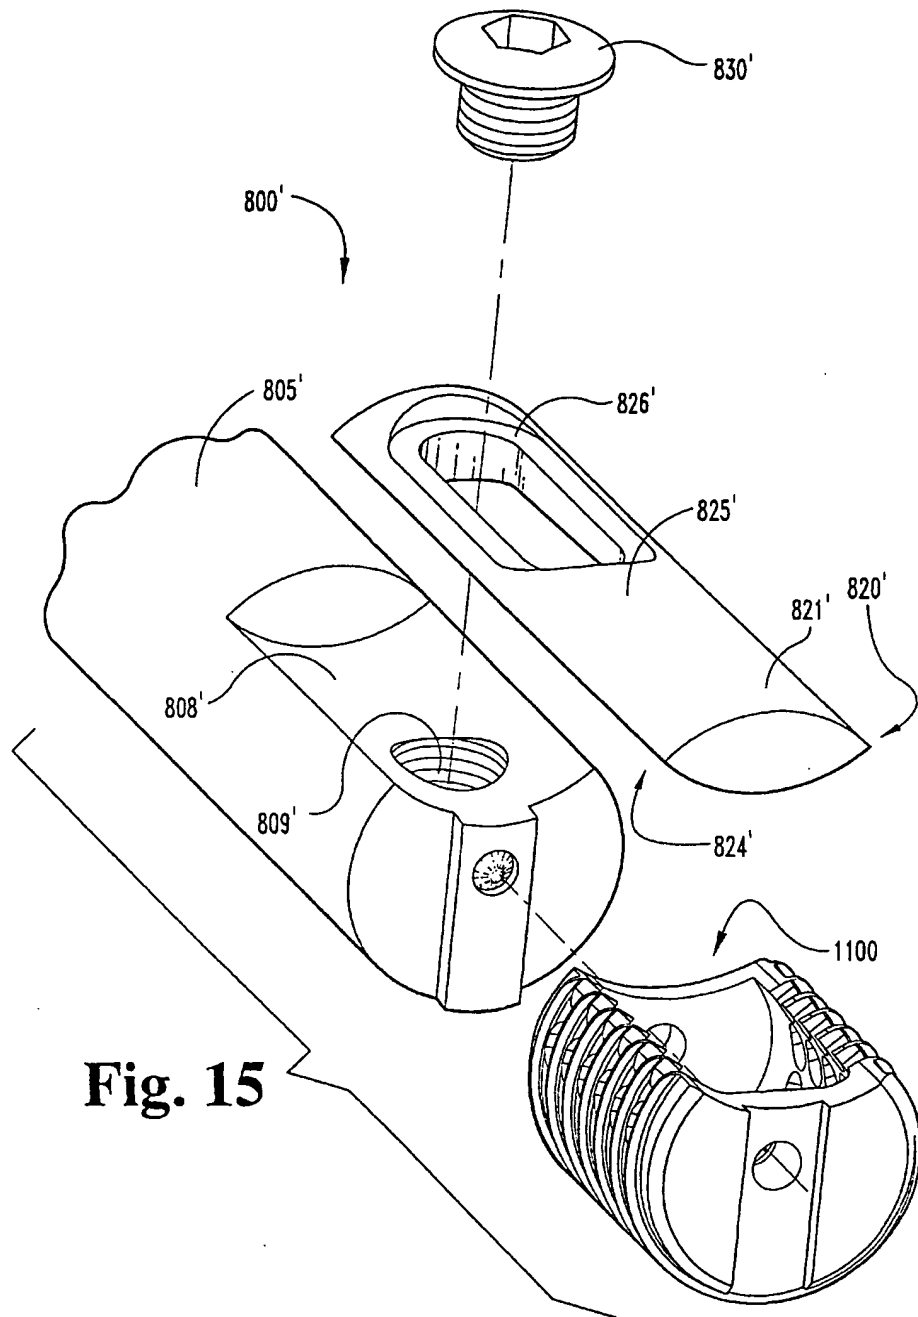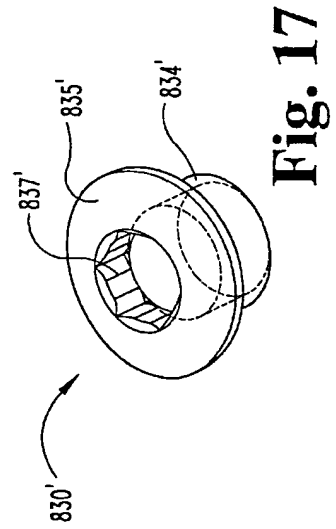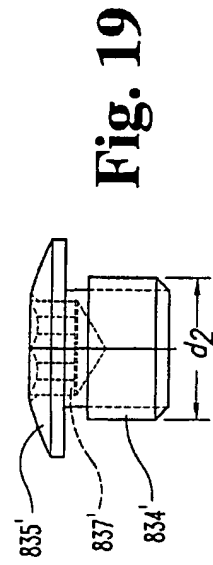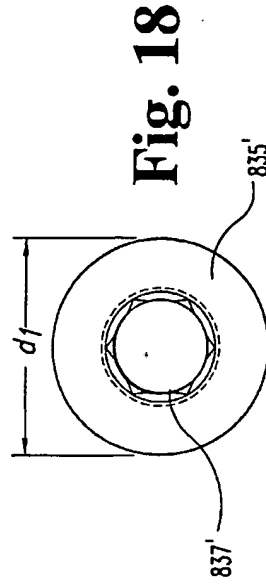


**Fig. 14**

**Fig. 15**

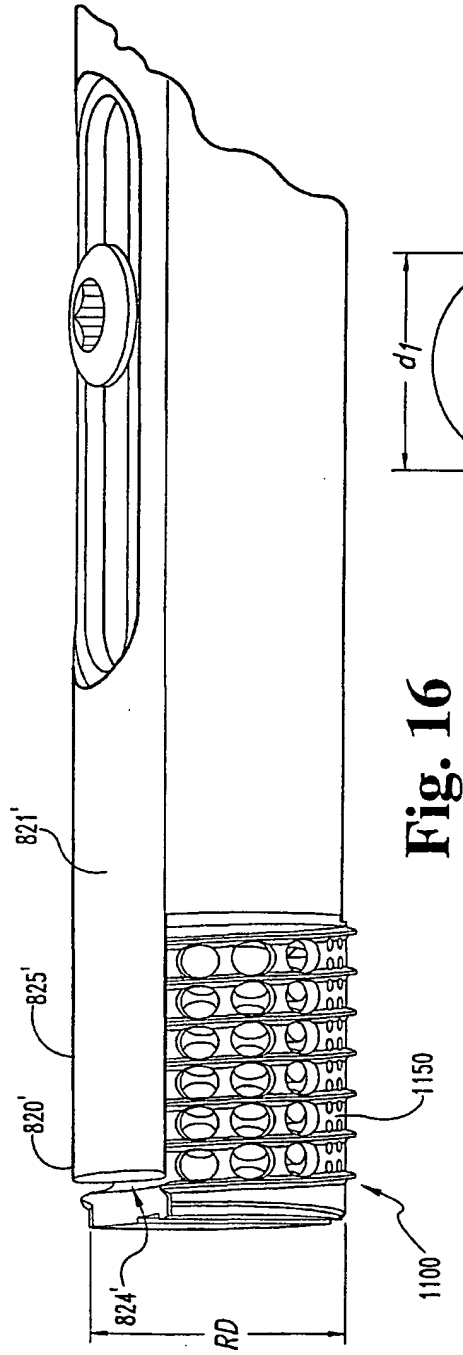

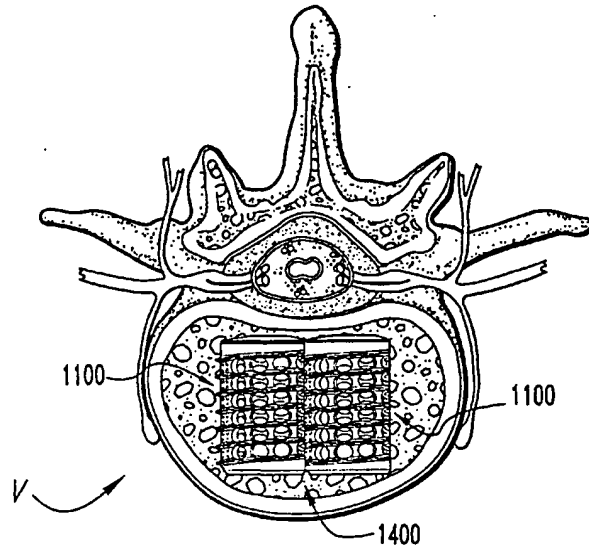

**Fig. 20**

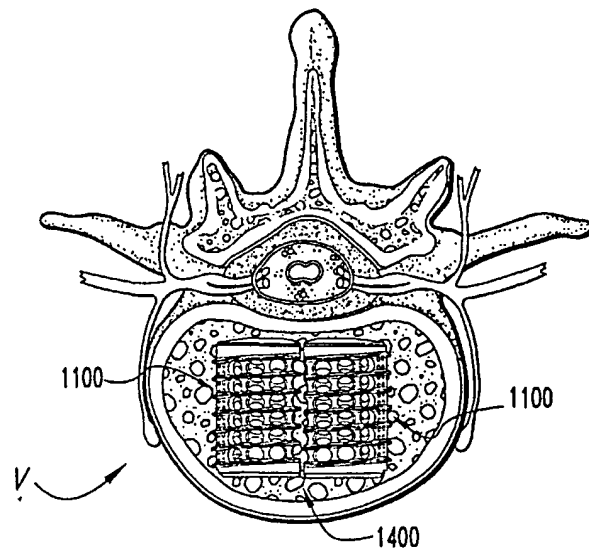

**Fig. 21**





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: <b>A61F 2/44</b>	<b>A3</b>	(11) International Publication Number: <b>WO 00/41655</b> (43) International Publication Date: 20 July 2000 (20.07.2000)
(21) International Application Number: <b>PCT/US00/00604</b> (22) International Filing Date: <b>11 January 2000 (11.01.2000)</b> (30) Priority Data: 60/115,388      11 January 1999 (11.01.1999) US (60) Parent Application or Grant SDGI HOLDINGS, INC. [/]; O. BOYD, Lawrence, M. [/]; O. BURKUS, J., Kenneth [/]; O. DORCHAK, John, D. [/]; O. BOYD, Lawrence, M. [/]; O. BURKUS, J., Kenneth [/]; O. DORCHAK, John, D. [/]; O. GANDY, Kenneth, A. ; O.	<b>Published</b>	
(54) Title: <b>INTERVERTEBRAL SPACERS WITH SIDE WALL ACCESSIBLE INTERIOR CAVITY</b> (54) Titre: <b>ESPACEURS INTERVERTEBRAUX A CAVITE INTERIEURE ACCESSIBLE PAR UNE PAROI LATERALE</b>		
(57) Abstract <p>Intervertebral spacers, tools for implanting intervertebral spacers and methods of promoting fusion bone growth in the space between adjacent vertebrae are provided. The spacers include an elongated body having a first end, a second end and an outer surface. Side walls connect the first and second ends. The elongated body also defines an interior cavity. The side wall defines an opening to the interior cavity in a side of the elongated body. At least one of the first and second ends has a discontinuity, such as a concave surface, for nesting with an adjacent spacer. The tools include spacer engaging means for engaging a spacer and occlusion means for blocking an opening defined in the spacer. In some embodiments, the occlusion means includes a plate extendible from the housing. In one specific embodiment the plate defines a groove which is disposed around a fastener attached to the housing so that the plate is slideable relative to the housing. The methods of promoting fusion bone growth include utilizing the inventive spacers described herein.</p> <p>(57) Abrégé</p> <p>L'invention concerne des espaceurs intervertébraux, des outils permettant d'installer ces espaceurs, et des techniques favorisant la croissance osseuse par fusionnement dans l'espace situé entre des vertèbres adjacentes. Ces espaceurs comprennent un corps allongé possédant une première extrémité, une seconde extrémité, et une surface extérieure. Les parois latérales relient les première et seconde extrémités. Le corps allongé définit également une cavité intérieure. Lesdites parois latérales définissent une ouverture vers la cavité intérieure, sur un côté du corps allongé. Au moins l'une des première et seconde extrémité présente une discontinuité, telle qu'une surface convexe, destinée à s'emboîter dans un espaceur adjacent. Les outils comprennent un organe d'engagement d'espaceur qui permet d'engager ledit espaceur, et un organe d'occlusion qui bloque une ouverture définie dans l'espaceur. Selon certains modes de réalisation, l'organe d'occlusion comprend une plaque extensible à partir du logement. Selon un mode de réalisation spécifique, la plaque définit une rainure entourant un système de fixation fixé au logement, de sorte que ladite plaque peut coulisser par rapport à ce dernier. Les techniques favorisant la croissance osseuse par fusionnement consistent à utiliser les espaceurs de cette invention.</p>		

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 July 2000 (20.07.2000)


PCT

(10) International Publication Number  
**WO 00/41655 A3**

- (51) International Patent Classification: A61F 2/44
- (21) International Application Number: PCT/US00/00604
- (22) International Filing Date: 11 January 2000 (11.01.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/115,388 11 January 1999 (11.01.1999) US
- (71) Applicant (for all designated States except US): SDGI HOLDINGS, INC. [US/US]; Suite 508, 300 Delaware Avenue, Wilmington, DE 19801 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): BOYD, Lawrence, M. [US/US]; 688 S. McLean Boulevard, Memphis, TN 38104 (US). BURKUS, J., Kenneth [US/US]; 7162 Williams Hill Road, Columbus, GA 31904 (US). DORCHAK, John, D. [US/US]; P.O. Box 400, Midland, GA 31820 (US).
- (74) Agents: GANDY, Kenneth, A. et al.; Woodard, Emhardt, Naughton, Moriarty & McNett, Bank One Center/Tower, Suite 3700, 111 Monument Circle, Indianapolis, IN 46204 (US).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent

[Continued on next page]

(54) Title: INTERVERTEBRAL SPACERS WITH SIDE WALL ACCESSIBLE INTERIOR CAVITY

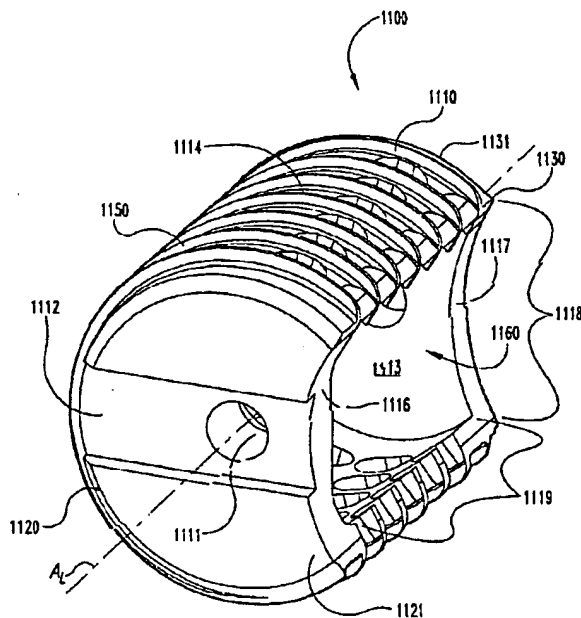

(57) Abstract: Intervertebral spacers, tools for implanting intervertebral spacers and methods of promoting fusion bone growth in the space between adjacent vertebrae are provided. The spacers include an elongated body having a first end, a second end and an outer surface. Side walls connect the first and second ends. The elongated body also defines an interior cavity. The side wall defines an opening to the interior cavity in a side of the elongated body. At least one of the first and second ends has a discontinuity, such as a concave surface, for nesting with an adjacent spacer. The tools include spacer engaging means for engaging a spacer and occlusion means for blocking an opening defined in the spacer. In some embodiments, the occlusion means includes a plate extendible from the housing. In one specific embodiment the plate defines a groove which is disposed around a fastener attached to the housing so that the plate is slideable relative to the housing. The methods of promoting fusion bone growth include utilizing the inventive spacers described herein.

WO 00/41655 A3

(88) Date of publication of the international search report:  
7 December 2000

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

## INTERNATIONAL SEARCH REPORT

In International Application No  
PCT/US 00/00604

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61F2/44

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 593 409 A (MICHELSON GARY K) 14 January 1997 (1997-01-14)  figures 41-43, 25, 30 column 12, line 55 - column 13, line 22 column 15, line 12 - line 29 claims 1-18	1, 3-20, 22-37, 52-57
Y	---	2, 21
Y	US 5 645 598 A (BROSNAHAN III ROBERT E) 8 July 1997 (1997-07-08) figures 4, 14 column 3, line 39 - column 5, line 61 --- -/--	2, 21

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

25 September 2000

Date of mailing of the international search report

03.10.2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5616 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2030, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Mary, C

## INTERNATIONAL SEARCH REPORT

Int. Application No.  
PCT/US 00/00604

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 17209 A (HOECK JAMES E VAN ;SDGI HOLDINGS INC (US); BOYD LAWRENCE M (US); M) 30 April 1998 (1998-04-30) figures 3-8,47-49 page 14, line 11 -page 16, line 4 page 28, line 24 -page 29, line 26 ----	1-37, 52-57
A	EP 0 302 719 A (SHOWELL A W SUGICRAFT LTD) 8 February 1989 (1989-02-08) column 2, line 19 - line 52 figures 1-6 ----	1,19,20, 34,52,53
A	US 4 736 738 A (GLOBEVNIK JOZE ET AL) 12 April 1988 (1988-04-12) figures 12-29 column 4, line 8 - line 36 ----	38,39
A	US 5 423 825 A (LEVINE ANDREW S) 13 June 1995 (1995-06-13) figures 1-17 column 6, line 47 -column 8, line 50 -----	38,39

Form PCT/ISA210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 00/08684

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 40-51  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 8.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.  
☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-37,52-57

An interbody fusion spacer.

2. Claims: 38-39

A spacer insertion tool.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No.

PCT/US 00/00604

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5593409 A	14-01-1997	US 5741253 A	21-04-1998
		US 5015247 A	14-05-1991
		AU 716409 B	24-02-2000
		AU 4445196 A	29-08-1996
		CA 2168835 A	30-04-1994
		CN 1134810 A	06-11-1996
		EP 0732093 A	18-09-1996
		JP 8266563 A	15-10-1996
		TR 960846 A	21-10-1996
		US 5785710 A	28-07-1998
		US 6080155 A	27-06-2000
		US 5505732 A	09-04-1996
		US 5797909 A	25-08-1998
		US 6096038 A	01-08-2000
		US 5484437 A	16-01-1996
		US 5772661 A	30-06-1998
		AT 169811 T	15-09-1998
		AU 3838789 A	12-01-1990
		CA 1332999 A	15-11-1994
		DE 68928790 D	24-09-1998
		DE 68928790 T	25-03-1999
		EP 0419564 A	03-04-1991
		EP 0712607 A	22-05-1996
		WO 8912431 A	28-12-1989
US 5645598 A	08-07-1997	US 5766253 A	16-06-1998
		AU 1748297 A	11-08-1997
		WO 9725946 A	24-07-1997
		US 6102948 A	15-08-2000
WO 9817209 A	30-04-1998	AU 4994697 A	15-05-1998
		EP 0955961 A	17-11-1999
		JP 2000507484 T	20-06-2000
		US 5989289 A	23-11-1999
		US 5888222 A	30-03-1999
EP 0302719 A	08-02-1989	AT 67395 T	15-10-1991
		DE 3864946 A	24-10-1991
		GB 2207607 A, B	08-02-1989
		GR 3002859 T	25-01-1993
		JP 1303148 A	07-12-1989
		JP 2114682 C	06-12-1996
		JP 8022294 B	06-03-1996
US 4736738 A	12-04-1988	US 4904261 A	27-02-1990
		NONE	
US 5423825 A	13-06-1995	AU 4597793 A	04-01-1994
		WO 9325150 A	23-12-1993